


Part Numbering Variations Matrix

EM PM

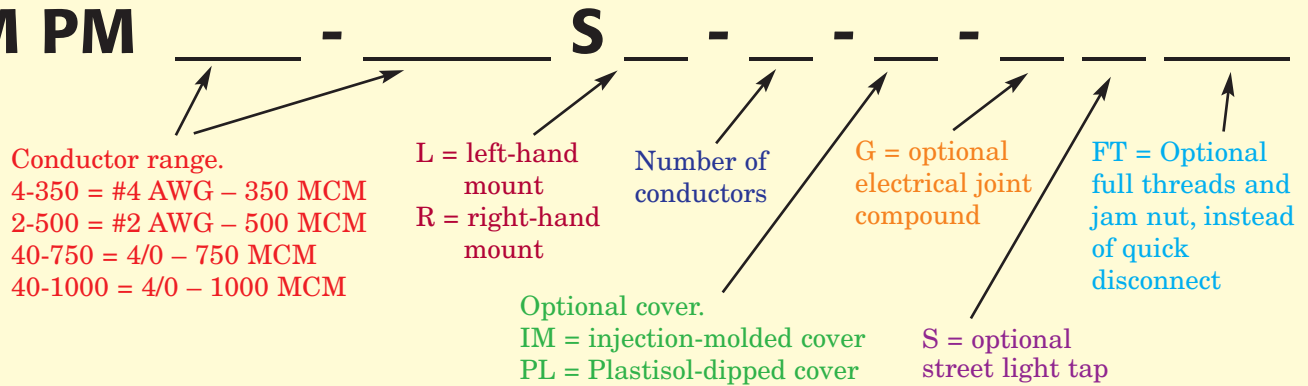

Example:

EM PM4-350SR-6-PL-S – Pad Mounted Transformer
Straight Secondary Connector, conductor range: #4 AWG – 350
MCM, right-hand mount, accommodates 6 conductors, with
Plastisol-dipped cover and street light tap.

Sample ordering information:

EM PM4-350SR-6 – Secondary connector for six conductors,
right-hand mount.

EM PM4-350SL-5 – Secondary connector for five conductors,
left-hand mount.

EM PM4-350SR-4 – Secondary connector for four conductors,
right-hand mount.

Add suffix for cover:

-**IM** for injection-molded cover

-**PL** for Plastisol-dipped cover

Add suffix -**G** for electrical joint compound.

Add suffix -**S** for street light tap.

Ordering information for covers only

Add prefix **IM** for injection-molded cover; **PL** for Plastisol-dipped cover.

Examples:

EM IMPM4-350SR-6 – Injection-molded cover for EM PM4-350SR-6.

EM PLPM4-350SL-4 – Plastisol-dipped cover for EM PM4-350SL-4.